

Complete Systems **SIGMA PET AIR**

FAD to 2772 m³/h, Blowing-air to 45bar




SIGMA PET AIR

The new standard in efficiency and convenience

What do you expect from a compressed air system?

As a PET container producer, you expect reliability, efficiency and air of the highest quality. That may sound simple, but there are many different factors to consider. Energy costs, for example, taken over the lifetime of a compressor add up to a multiple of investment costs. Efficient energy consumption therefore plays a vital role in the production of compressed air, as does reliability. Continuous operation and desired container production targets can only be achieved with a dependable source of quality oil-free compressed air. Pre-assembled modules, with all components fully piped and wired, ensure maximum reliability and convenience. No complicated installation work is necessary – simply connect the system to the power source & air distribution network and your air supply is ready to go.


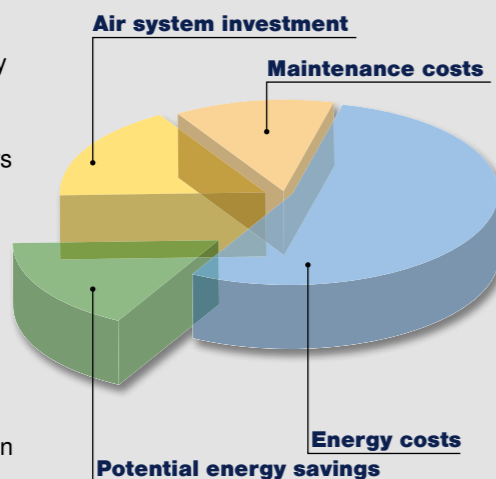


Innovative, modular design

SIGMA PET AIR combines the production of high-pressure and control air into a single, turnkey system.

The air-cooled rotary screw compressor produces the control air and also serves as a pre-compressor for the high-pressure blowing air.

The booster providing the high-pressure blowing air, the system controller and all other air treatment components for both compressor systems are installed, ready for operation, on a base frame.

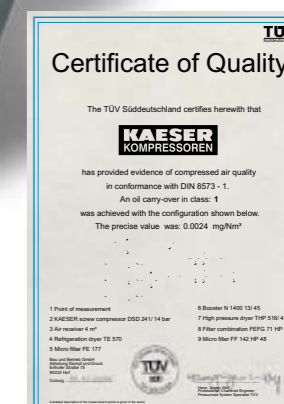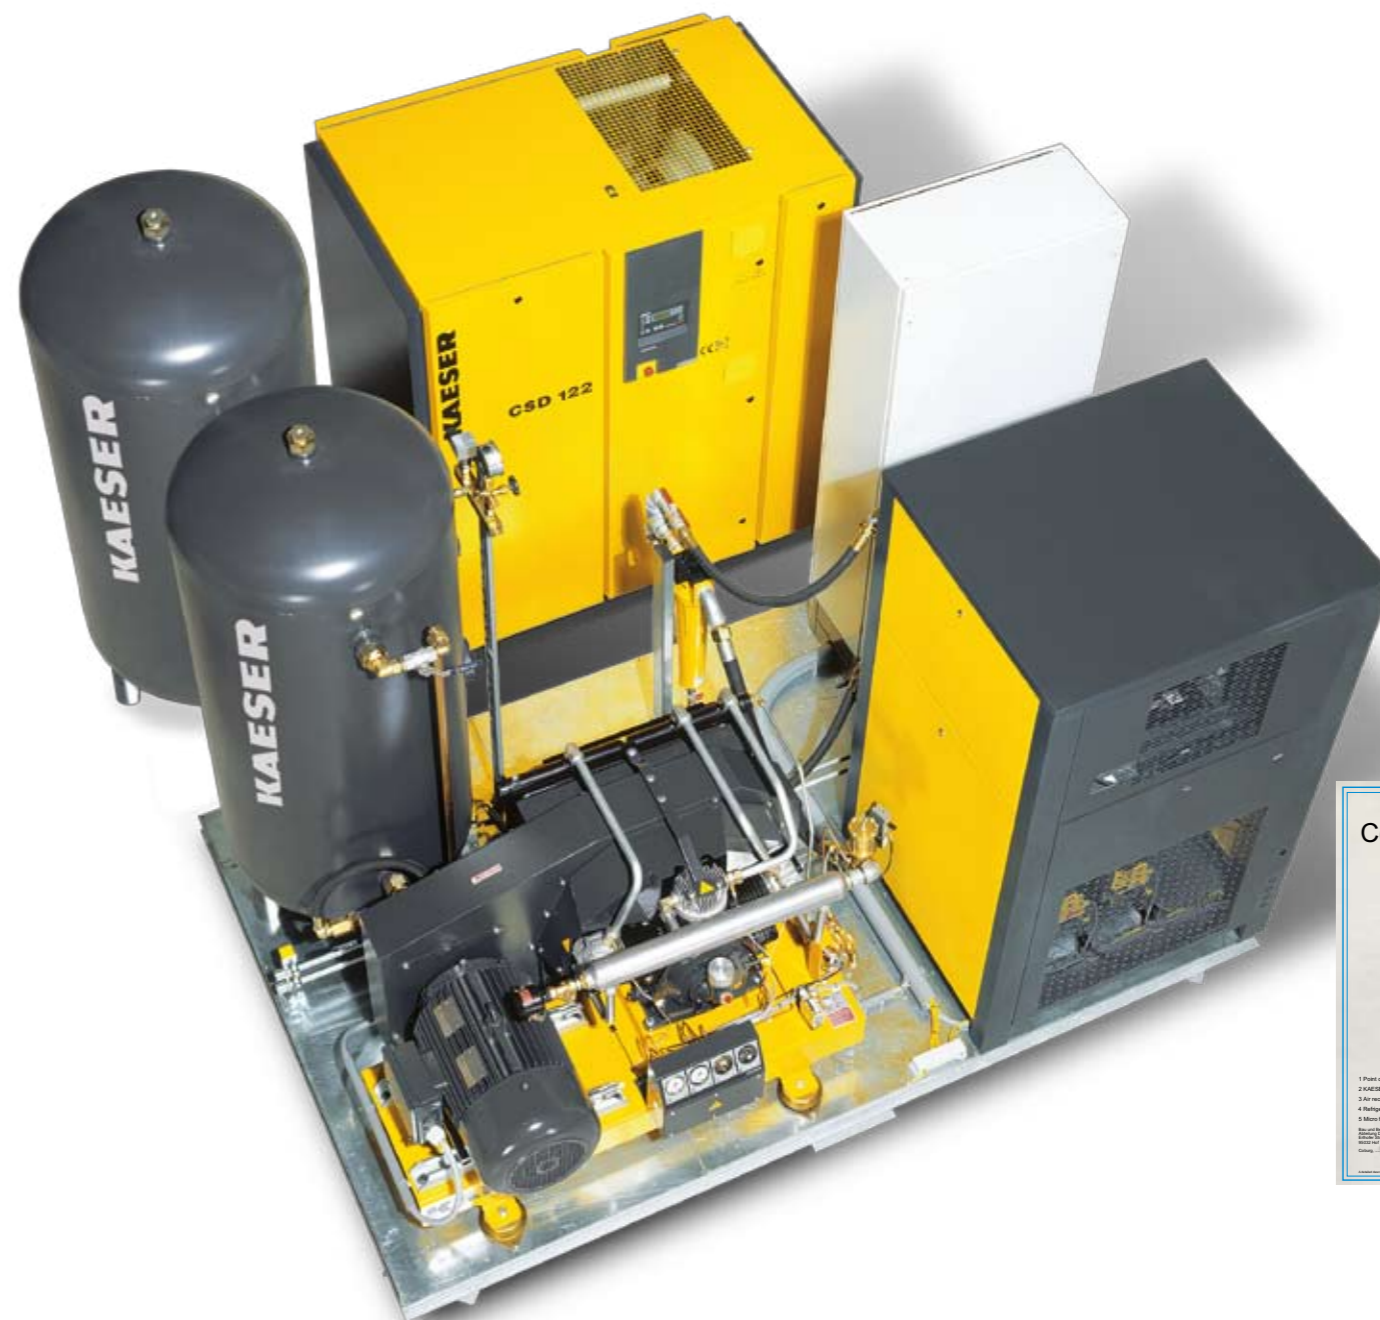

Container solutions

Turnkey SIGMA PET AIR systems are also available ready-installed in a container if required. This solution significantly reduces both installation and construction costs.



Low operating costs

All components are precisely matched to provide maximum energy efficiency. SIGMA PET AIR systems with fluid-cooled rotary screw compressors and single-stage boosters are considerably more efficient than equivalent conventional compressor installations. Furthermore, KAESER systems use air-cooled components, avoiding the need for expensive cooling water and cost-intensive water re-circulating equipment. All systems are supplied fully assembled and factory tested.

SIGMA PET AIR –

For all of your compressed air needs

The SIGMA PET AIR system comprises five components:



1 Energy saving rotary screw compressor

The energy saving SIGMA PROFILE was developed and optimised by KAESER KOMPRESSOREN and provides the basis for production of control and process air.

2 High efficiency booster

Booster compression ratios are kept to a minimum by precisely matching the booster to suit screw compressor performance, which in-turn improves energy efficiency.

3 Certified compressed air quality

The quality of the technically oil-free air produced by the SIGMA PET AIR system is tested and certified by TÜV, the German Technical Inspection Authority. The oil and solid particle content is reliably kept below Class 1 limits as per ISO 8573-1.

4 Complete air receiver package

High- and low-pressure air receivers are both equipped with all necessary fittings, including an electronic condensate drain.

5 Automatic control

The KAESER Control monitoring and control unit is located in the central switching cabinet, which also contains the booster controller (star-delta) and fuses for all drives.



Model	Blow air at max. working pressure m³/h	Control air at max. working pressure m³/h	Installed motor power of all components kW	Max. working pressure	
				Blow air bar(g)	Control air bar(g)
336 HP	336	-	61	36	-
405 HP	360	45	78	36	8
416 HP	360	56	78	36	8
489 HP	489	-	88	36	-
492 HP	420	72	88	36	8
600 HP	500	100	107	36	8
642 HP	535	107	109	36	8
708 HP	505	203	109	36	8
744 HP	744	-	141	36	-
780HP	660	120	132	36	8
784 HP	784	-	141	36	-
804 HP 1	630	174	132	36	8
804 HP 2	744	60	141	36	8
955 HP	784	171	162	36	8
1020 HP	1020	-	201	36	-
1167 HP	1020	156	202	36	8
1233 HP	1020	213	202	36	8
1284 HP	1284	-	231	36	-
1416 HP	1260	156	231	36	8
1572 HP	1350	222	264	36	8
1608 HP	1489	119	275	36	8
1893 HP	1893	-	371	36	-
1920 HP	1560	360	320	36	8
2448 HP	2160	288	451	36	8
2772 HP	2772	-	558	36	-

45 bar versions and differential pressure control are available upon request.

Boosters from KAESER KOMPRESSOREN – from the compact N253 G to the large N1400 G – are designed and built in accordance with the most stringent quality standards. Additional features include specially constructed airends with oil pumps and various coolers, which are especially important for pressures up to 45 bar. In addition, design details such as pressurised oil lubrication and intensive cylinder cooling allow up to 100 percent duty cycles. For further details, please refer to brochure P-480 (Boosters).

SIGMA PET AIR — Eight decisive advantages



1 Modular turnkey systems

Modular design enables systems to be precisely tailored to meet the specific needs of a given application and allows fast, cost-effective installation coupled with outstanding energy efficiency.




2 Certified compressed air quality

The oil and solid particle content is reliably kept below Class 1 limits as per ISO 8573-1. The quality of the blowing- and control-air leaving the air treatment equipment conforms to the requirements for technically oil-free compressed air. The quality of the air produced by the SIGMA PET AIR system is tested and certified by TÜV, the German Technical Inspection Authority.



3 Economical and efficient

All components are precisely tailored to work with one another to achieve maximum energy efficiency. SIGMA PET AIR solutions featuring fluid-cooled rotary screw compressors and single-stage boosters are significantly more efficient than conventional systems. Furthermore, the use of air-cooled components eliminates the need for expensive cooling-water and investment in complex cooling systems. SIGMA PET AIR systems are supplied fully assembled and works tested.

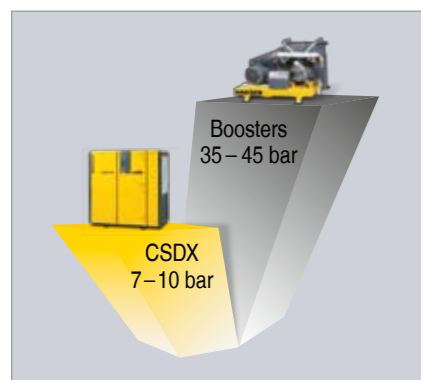

4 Blowing- and control-air

Blowing-air at 35 to 45 bar and control-air at 7 to 10 bar: SIGMA PET AIR systems produce compressed air in both pressure ranges without the need for additional investment. Energy consumption and investment costs are considerably reduced, as control-air is directly drawn off at the pre-booster stage. In addition, systems are mounted on a base-frame, which makes transportation and installation simple and enables space requirement to be kept to a minimum.

5 Energy saving screw compressors

The world renowned SIGMA PROFILE, developed by KAESER, saves up to 15 percent energy compared with conventional rotary screw profiles. The 1:1 direct drive reduces energy consumption still further as it operates without transmission loss. The PC-based SIGMA CONTROL provides fully automatic control and monitoring of the compressor system. Operation is made simple via 'traffic light style' LEDs and the plain text display which is able to show all information in any one of 30 selectable languages. A choice of four control modes is available to allow selection of the most appropriate for a specific application.




6 Cost-effective cooling

The boosters are usually equipped with air-cooled after-coolers. In air-cooled units, a separate cooler and fan motor ensure minimal temperature difference (ΔT) between the intake air and compressed air. If required, larger models can be equipped with a water-cooled after-cooler.



7 Low service-costs

As SIGMA PET AIR systems have only two compression stages (screw compressor and booster), users benefit from significant advantages when it comes to servicing and maintenance. Single-stage boosters for SIGMA PET AIR systems require considerably less servicing than multi-stage high-pressure reciprocating compressors. KAESER screw compressors feature directly driven, low-speed airends and are renowned for their low maintenance requirement.

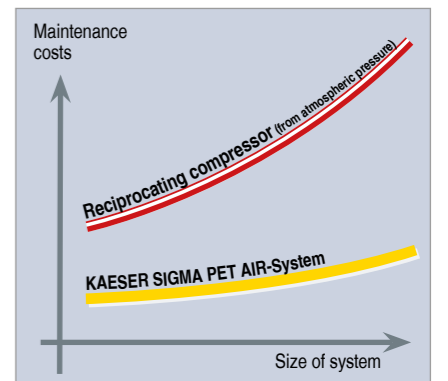

8 Single-source systems – For all of your needs

KAESER KOMPRESSOREN provides all necessary components for every SIGMA PET AIR system. Users are therefore assured unrivalled efficiency, reliability and availability in the production of control- and blowing-air for PET container manufacture.



KAESER – The world is our home

As one of the world's largest manufacturers of rotary screw compressors, KAESER KOMPRESSOREN is represented throughout the world by a comprehensive network of branches, subsidiary companies and authorised partners in over 90 countries.

With innovative products and services, KAESER KOMPRESSOREN's experienced consultants and engineers help customers to enhance their competitive edge by working in close partnership to develop progressive system concepts that continuously push the boundaries of performance and compressed air efficiency. Moreover, the decades of knowledge and expertise from this industry-leading system provider are made available to each and every customer via the Kaeser group's global computer network.

These advantages, coupled with KAESER's worldwide service organisation, ensure that all products operate at the peak of their performance at all times and provide maximum availability.



KAESER Compressors SA (PTY) Ltd.

79 Watt Street – 1401 Meadowdale-Johannesburg – P.O. Box 5031

Phone: 0027 11974 5002 – Fax: 0027 11974 6696

www.kaeser.co.za – Email: info.southafrica@kaeser.com



KAESER Kompressoren GmbH

P.O. Box 2143 – 96410 Coburg – GERMANY – Tel: +49 9561 640-0 – Fax: +49 9561 640130

www.kaeser.com – e-mail: productinfo@kaeser.com