





Air-Main Charging Systems DHS Series

Connection up to DN 300



Why do we need an air-main charging system?

Compressed air treatment systems are designed for a certain rate of air flow which, when the system is operating at full load, pushes against the pressurised air in the air distribution network. However, should this resistance not be present, for example during periods of low load or downtime, it is possible that dryers and filters may be overwhelmed by the sudden surge in airflow that occurs when the system re-starts. Air-main charging systems prevent this from occurring. They not only ensure consistent compressed air quality, but also enhance system reliability and significantly extend the service life of air treatment equipment.

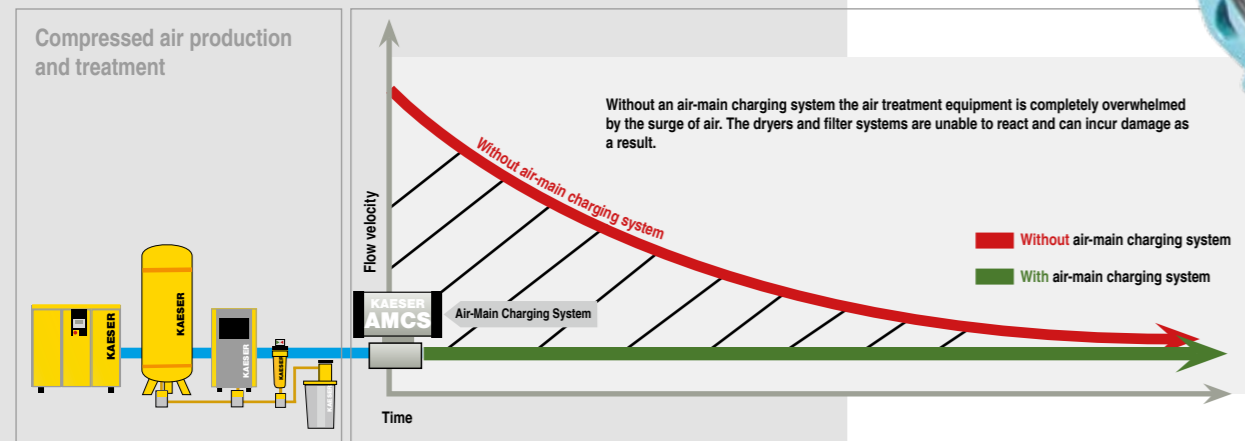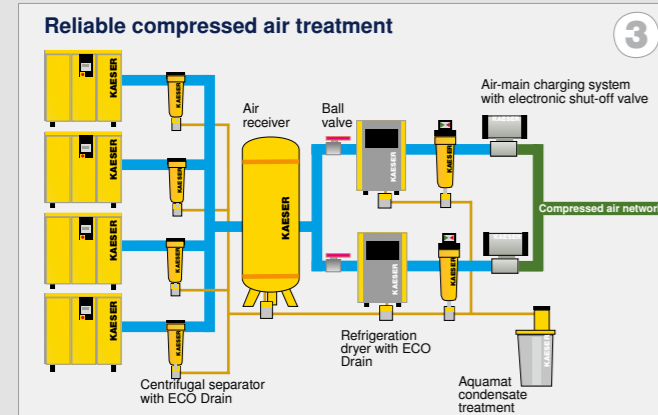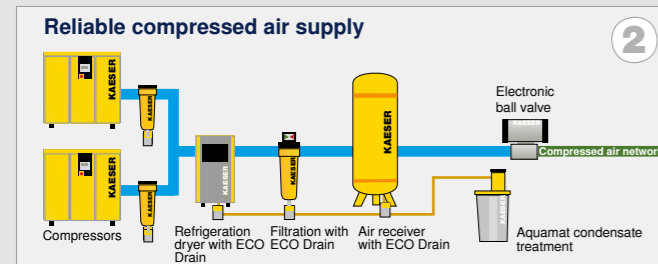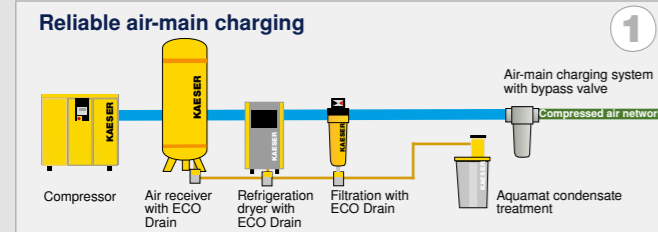

Assured performance

Performance according to requirement

Depending on requirement, KAESER air-main charging systems can be designed to provide reliable compressed air supply or treatment.



Up to 1 inch

Bypass valves can be used as air-main charging systems for start-up of smaller compressed air systems that have an air distribution piping diameter up to 1 inch.



Up to 3 inches

To prevent unwanted pressure losses during system shutdown periods, electro-pneumatic ball valves are used in KAESER air-main charging systems for air installations with a distribution pipe diameter between 1/2 inch and 3 inches. Can be remotely controlled via volts-free contacts from dryers or filters.



Up to DN 300

Versions with electro-pneumatically operated insertion type butterfly valves are used for systems with air distribution pipe diameters from DN 40 to DN 300. Can be remotely controlled via volts-free contacts from dryers or filters. This enables immediate shutdown of the air-main charging system in the event of a fault occurring.

Tailored reliability

Reliable air-main charging...

...with the KAESER bypass valve. Suitable for basic compressed air systems with one compressor and air distribution piping up to 1 inch in diameter.

Reliable compressed air supply and system start-up...

...with KAESER's proven air-main charging systems. Ideal for compressed air installations with several compressors and a single air treatment package.

Reliable compressed air supply and system start-up...

...for compressed air installations with several air treatment packages is achieved by equipping each with a KAESER air-main charging system.

This ensures consistent compressed air quality even when only one air treatment package in operation.

Technical Specifications

Bypass valves

Connection diameter	Pressure setting range	Max. working pressure	Max. working temperature	Dimensions (10 bar version) W x D x H mm	Weight (10 bar version) kg
	bar				
G 1/2	4-10	16	80	65 x 90 x 185	1
G 3/4	4-10	16	80	75 x 90 x 185	1.1
G 1	4-10	16	80	90 x 90 x 185	1.5

Pre-installed air-main charging systems

Connection diameter	Max. working pressure			Max. working temperature °C	Reliable compressed air treatment	Reliable compressed air supply	Dimensions W x D x H approx. mm	Weight kg
	10 bar	16 bar	40 bar					
Versions with ball valve								
G 1/2	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	100	●	<input type="checkbox"/>	220 x 230 x 400	3.9
G 3/4	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	100	●	<input type="checkbox"/>	220 x 230 x 410	4.0
G 1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	100	●	<input type="checkbox"/>	230 x 230 x 430	4.3
G 1 1/4	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	100	●	<input type="checkbox"/>	240 x 240 x 450	4.7
G 1 1/2	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	100	●	<input type="checkbox"/>	240 x 240 x 460	5.7
G 2	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	100	●	<input type="checkbox"/>	250 x 240 x 480	6.8
G 2 1/2	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	100	●	<input type="checkbox"/>	260 x 240 x 490	10
G 3	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	100	●	<input type="checkbox"/>	270 x 240 x 500	12
Versions with butterfly valve								
DN 40	<input type="radio"/>	<input type="radio"/>	–	50	●	<input type="checkbox"/>	220 x 220 x 560	6
DN 50	<input type="radio"/>	<input type="radio"/>	–	50	●	<input type="checkbox"/>	270 x 230 x 580	9
DN 65	<input type="radio"/>	<input type="radio"/>	–	50	●	<input type="checkbox"/>	270 x 250 x 620	11
DN 80	<input type="radio"/>	<input type="radio"/>	–	50	●	<input type="checkbox"/>	270 x 260 x 670	13
DN 100	<input type="radio"/>	<input type="radio"/>	–	50	●	<input type="checkbox"/>	315 x 260 x 700	18
DN 125	<input type="radio"/>	<input type="radio"/>	–	50	●	<input type="checkbox"/>	345 x 260 x 750	22
DN 150	<input type="radio"/>	<input type="radio"/>	–	50	●	<input type="checkbox"/>	410 x 280 x 800	33
DN 200	<input type="radio"/>	<input type="radio"/>	–	50	●	<input type="checkbox"/>	440 x 330 x 880	47
DN 250	<input type="radio"/>	<input type="radio"/>	–	50	●	<input type="checkbox"/>	490 x 400 x 970	64
DN 300	<input type="radio"/>	<input type="radio"/>	–	50	●	<input type="checkbox"/>	550 x 470 x 1070	90

Electric power supply 230 V, AC, 50 Hz

- Please state max. working pressure when ordering
- Set at factory
- Adjustable on-site

Pre-installed air-main charging systems when delivered:
Reliable compressed air quality, on-site modification possible.

KAESER Compressors SA (PTY) Ltd.

79 Watt Street – 1401 Meadowdale-Johannesburg – P.O. Box 5031
Phone: 0027 11974 5002 – Fax: 0027 11974 6696
www.kaeser.co.za – Email: info.southafrica@kaeser.com



KAESER Kompressoren GmbH

P.O. Box 2143 – 96410 Coburg – GERMANY – Tel: +49 9561 640-0 – Fax: +49 9561 640130
www.kaeser.com – e-mail: productinfo@kaeser.com

